

TikTok



GENERAL CONTRACTOR
NOVO Construction

ARCHITECT
IA Interior Architects

LOCATION
Austin, Texas

SECTOR
Corporate interiors

MATERIALS
Wood, Metal, Stone

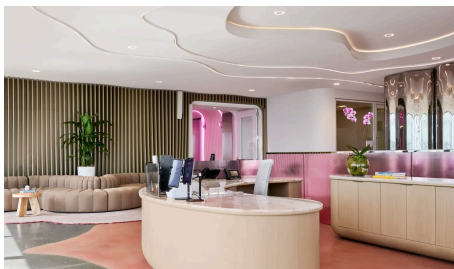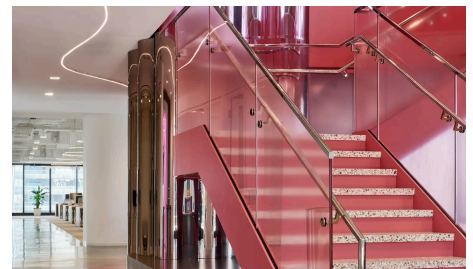

SUMMARY

Dovetail fabricated the architectural millwork, metalwork and stone for TikTok, a corporate tenant improvement project in Austin, Texas. NOVO Construction was the general contractor and IA Interior Architects the architect. Phase 1 shipped mainly in 2024, and Phase 2 shipped between late 2024 and early 2025.

SCOPE HIGHLIGHTS

- Phase 1 covers Levels 27, 28, 29 and 32
- Each elevator corridor has a tambour wall with a metal top cap, an elevator surround, radiused door portals and a rippled ceiling
- Every floor also has a print room with laminate cabinets, a breakroom with a stone-topped island, and a wellness or mothers room with a vanity and stone counter
- Phone booths, curved phone counters and radius planters run across all four floors